

A silver FAAC 950N2 door automation unit is mounted on a dark grey door frame. The unit is a rectangular box with the FAAC logo on its side. A silver arm extends from the bottom of the unit, connecting to a horizontal bar. The background is a solid blue wall.

950N2

**AUTOMATION FOR
SWING DOORS**

FAAC
Simply automatic.

OPEN AND CLOSE IN ABSOLUTE SILENCE



950N2

VERSATILE AND STYLISH

The FAAC 950N2 automations (with spring closing system) can be installed both on the architrave and directly on the structure of the door.

The automation housing cover is supplied in anodised extruded aluminium. As an alternative, it can be supplied in moulded ABS to be ordered separately. The 950N2 automations can also be used to automate double-leaf entrances by setting up two units in a master / slave configuration allowing the double leaf to be moved as if by a single system.

SAFE AND INTELLIGENT

The automation system is equipped with two electronic boards: 950N2 MPS (control board) and 950N2 I/O (input/output board). A microprocessor controls all door activity in real time and a magnetic encoder continuously detects its angular position. The operating logic (automatic, manual, night, open) can also be selected via an integrated selector. The system is manufactured in conformity with the new European Safety Standards. The speed and force are programmed according to the dimensions of the door. If an obstacle is detected, the door re-opens immediately and as it closes, it checks, at reduced speed, that the obstacle is no longer present.

POWERFUL AND RELIABLE

Carefully selected mechanical and electrical components means that our 950N2 automation system is able to move leaves weighing over 360 Kg in continuous use, while always maintaining absolute operational safety.

TECHNICAL CHARACTERISTICS

Power supply	220-240 V~ - 50/60 Hz
Max power	100 W
Stand-by power without accessories	5 W
Frequency of use	100%
Electric motor	24V motor 
Max. accessories load	1A - 24V 
Electric lock power supply	(N.O./N.C.) 24V  / 500mA max
Dimensions (LxDxH)	530x160x105 mm
Weight	10 Kg
Operation in the event of a power failure	Manual push/pull opening - Spring closing
Max leaf opening angle	100° - 125°
Opening speed adjustment	4 - 10 s (adjustable)
Closing speed adjustment	4 - 10 s (adjustable)
Partial opening adjustment	10% - 90% of total opening
Pause time	0 - 30 s
Night pause time	0 - 90 s
Encoder	Standard
Protection sensor monitoring (EN16005)	Standard (may be bypassed)
Low Energy movement (EN16005)	Standard (may be bypassed)
Operating temperature	-20°C to +55°C
Protection rating	IP 23 (for indoor use only)
Compliance with standards	EN 16005; EN 61000-6-2; EN 61000-6-3; EN 13849-1; EN13849-2

EN16005


Complies with European Standard EN16005 regarding the safety in use of automatic doors.




SAFE ZONE: The systems that make it easier to produce automation systems that comply with the requirements of the current European Directive on safety (DM 2006/42/EC).

950N2

MAIN FEATURES



950N2 I/O
CONTROL BOARD

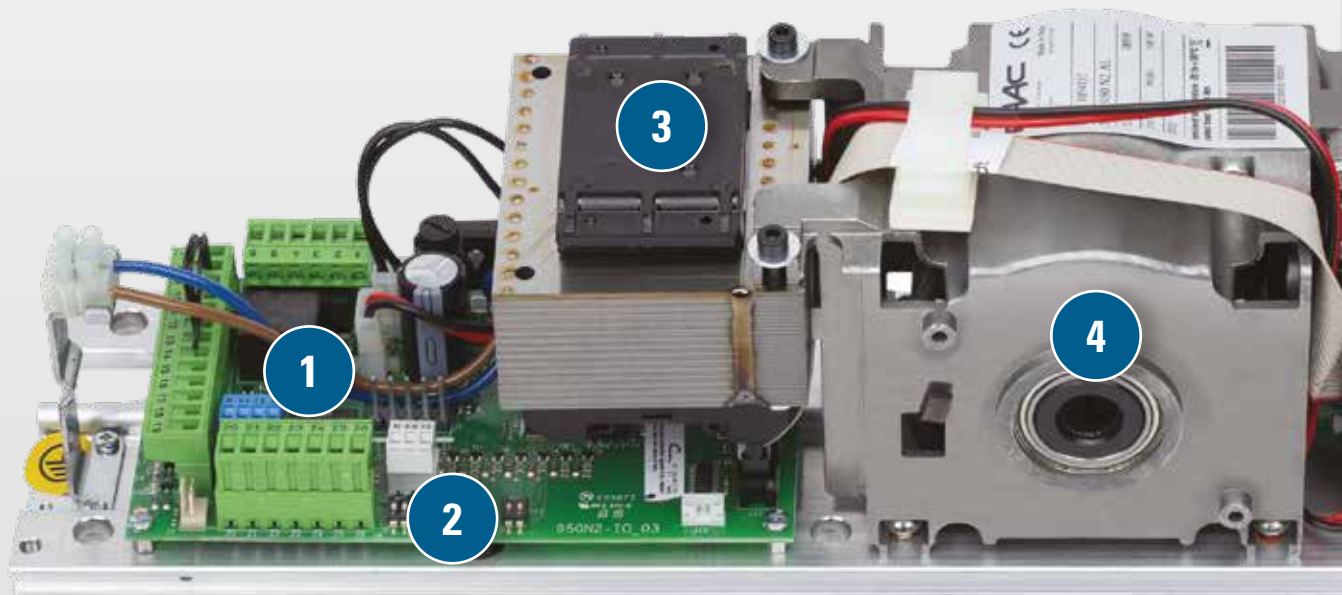


ARTICULATED ARM
WITH TELESCOPIC ADJUSTMENT
IN ANODISED ALUMINIUM




SLIDING ARM
IN ANODISED ALUMINIUM




Selectable ANTI-WIND function (ensures that the door is closed even if there is a strong wind).




Time slots can be programmed via the calendar management function (available with KP EVO keypad)





RADIO
RECEIVER CONNECTOR



LAMINATED
TRANSFORMER




RETURN SPRING WITH
TRANSMISSION ARM COUPLING

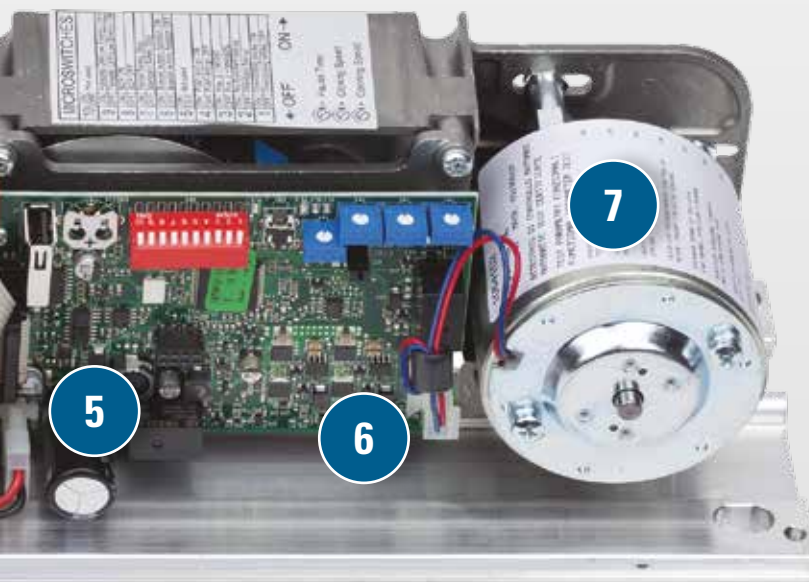

950N2 MPS CONTROL BOARD



DC
MOTOR

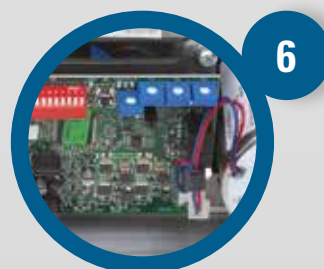


INTEGRATED MAGNETIC
ENCODER


950N2



KP EVO PROGRAMMING
AND FUNCTIONS KEYPAD



FUNCTIONS SELECTOR

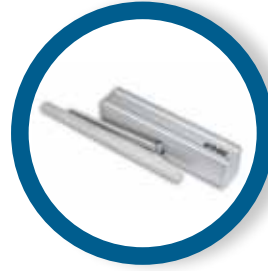

ANODISED
ALUMINIUM CASING

STANDARD FUNCTIONS


- Operating logics: AUTOMATIC, OPEN, MANUAL/NIGHT
- Self-learning of open and closed positions and door weight measurement
- Anti-crushing safety device active during both opening and closing
- Selectable "PUSH and GO" function (commands the opening by simply pushing the door)
- Selectable "ANTI-WIND" function (ensures that the door is closed even if there is strong wind)
- Closing thrust to ensure that the door closes even if there is strong wind
- AVS function (Anti Vandal System) to protect the motor if the leaf movement is forced
- Manual operation in the event of mains power failure
- Adjustment trimmer for opening speed, closing speed and pause time
- Can be used with microwave radar, infrared sensors, laser sensors, push-button controls, photocells, electric locks, locks, KP EVO programming unit, FAAC radio controls

The following functions can be used using the KP EVO, LK EVO and KS EVO functions keypad:

- Operating logics: AUTOMATIC, MANUAL, OPEN, ONE-DIRECTIONAL, NIGHT, PARTIAL OPEN, DIAGNOSTICS WITH A WIDE RANGE OF SIGNALS.

The following functions can be used using the KP EVO keypad with integrated display:

- Opening and closing speed adjustment
- Pause time adjustment
- Opening width adjustment
- Interlock function
- Master-Slave function for double leaf doors
- Can be used with acoustic or light signal transit indicators
- Self-diagnosis



KEY OPERATED KS EVO FUNCTIONS SELECTOR



LK EVO FUNCTIONS SELECTOR



ARTICULATED PUSH ARM



HOUSING COVER IN MODULED ABS (to be ordered separately)



Compliant with standard
UL325 and CSA Standard
CAN/CSA - 22.2



USE

Model	Leaf length (mm)	Max leaf weight (kg) Articulated push arm	Max leaf weight (kg) Short sliding arm	Max leaf weight (kg) Standard sliding arm
950N2	700	367	286	-
	750	320	249	-
	800	281	219	-
	850	249	-	194
	900	222	-	173
	950	199	-	155
	1000	180	-	140
	1050	163	-	127
	1100	149	-	116
	1150	136	-	106
	1200	125	-	97
	1250	115	-	90
	1300	107	-	83
	1350	99	-	77
	1400	92	-	71

HEADQUARTERS

ITALY

FAAC S.p.A. - Soc. Unipersonale
Via Calari 10 - 40069 Zola Predosa (BO)
Tel. +39 051 61724 - Fax +39 051 0957820
it.info@faacgroup.com - www.faacgroup.com

SUBSIDIARIES

ASIA - PACIFIC

FAAC MALAYSIA
MAGNETIC CONTROL SYSTEMS SDN BHD
Selangor, Malaysia
tel. +60 3 5123 0033
www.faac.biz

AUSTRALIA

FAAC AUSTRALIA PTY LTD
Regents Park, Sidney, NSW
www.faac.com.au

AUSTRIA

FAAC GMBH
Salzburg, Austria
tel. +43 662 85333950
www.faac.at

FAAC BV - TUBULAR MOTORS
Doetinchem, The Netherlands
tel. +49 30 5679 6645
faacbv.info@faacgroup.com
www.faac-tubularmotors.com

BENELUX

FAAC BENELUX NV/SA
Jabbke, Belgium
tel. +32 50 320202
info@faacbenelux.com
www.faacbenelux.com

FAAC BV
Doetinchem, The Netherlands
tel. +31 314 369911
faacbv.info@faacgroup.com
www.faacbv.com

BRAZIL

INDÚSTRIAS ROSSI ELETROMECÂNICA LTDA
Brasília DF, Brazil
tel. +55 61 33998787
www.rossiportoes.com.br

CHINA

FAAC SHANGHAI
Shanghai, China
tel. +86 21 68182970
www.faacgroup.cn

FRANCE

FAAC FRANCE
Saint Priest - Lyon, France
tel. +33 4 72213020
www.faac.fr

FAAC FRANCE - AGENCE PARIS
Massy - Paris, France
tel. +33 4 72213020
www.faac.fr

FAAC FRANCE - DEPARTEMENT VOLETS
Saint Denis de Pile - Bordeaux, France
tel. +33 5 57551890
www.faac.fr

GERMANY

FAAC GMBH
Freilassing, Germany
tel. +49 8654 49810
www.faac.de

FAAC BV - TUBULAR MOTORS
Doetinchem, The Netherlands
tel. +49 30 5679 6645
faacbv.info@faacgroup.com
www.faac-tubularmotors.com

INDIA

MAGNETIC FAAC INDIA PVT LTD.
Chennai - India
Tel. +91 44 421 23297
info@magnetic-india.com
www.faacindia.com

IRELAND

NATIONAL AUTOMATION LTD
Co. Roscommon, Ireland
tel. +353 71 9663893
www.nal.ie

MIDDLE EAST

FAAC MIDDLE EAST FZE
Dubai, UAE
tel. + 971 4 3724190
www.faac.ae

POLAND

FAAC POLSKA SP.ZO.O
Warszawa, Poland
tel. +48 22 8141422
fax +48 22 8142024
www.faac.pl

RUSSIA

FAAC RUSSIA
Moscow, Russia
tel. +7 (495) 646 24 29
www.faac.ru

SCANDINAVIA

FAAC NORDIC AB
Perstorp, Sweden
tel. +46 435 779500
www.faac.se

SOUTH AFRICA

CENTURION SYSTEMS PTY LTD
Johannesburg, South Africa
tel. +27 11 699 2400
www.centsys.co.za

SPAIN

CLEM, S.A.U.
San Sebastián de los Reyes - Madrid, Spain
tel. +34 91 3581110
www.faac.es

SWITZERLAND

FAAC AG
Altdorf, Switzerland
tel. +41 41 8713440
www.faac.ch

TURKEY

FAAC OTOMATİK GEÇİŞ SİSTEMLERİ
SAN. VE TİC. LTD. SİRKETİ
İstanbul, Turkey
tel. +90 (0)212 - 3431311
www.faac.com.tr

UNITED KINGDOM

FAAC UK LTD.
Basingstoke Hampshire, UK
tel. +44 1256 318100
www.faac.co.uk

U.S.A.

FAAC INTERNATIONAL INC
Rockledge, Florida - U.S.A.
tel. +1 866 925 3222
www.faacusa.com

FAAC INTERNATIONAL INC
Fullerton, California - U.S.A.
tel. +1 714 446 9800
www.faacusa.com

FAAC S.p.A. - Soc. Unipersonale
Via Calari 10 - 40069 Zola Predosa (BO)
Tel. +39 051 61724 - Fax +39 051 0957820
it.info@faacgroup.com

FAAC
Simply automatic.